



ALTERNATIVE 1:

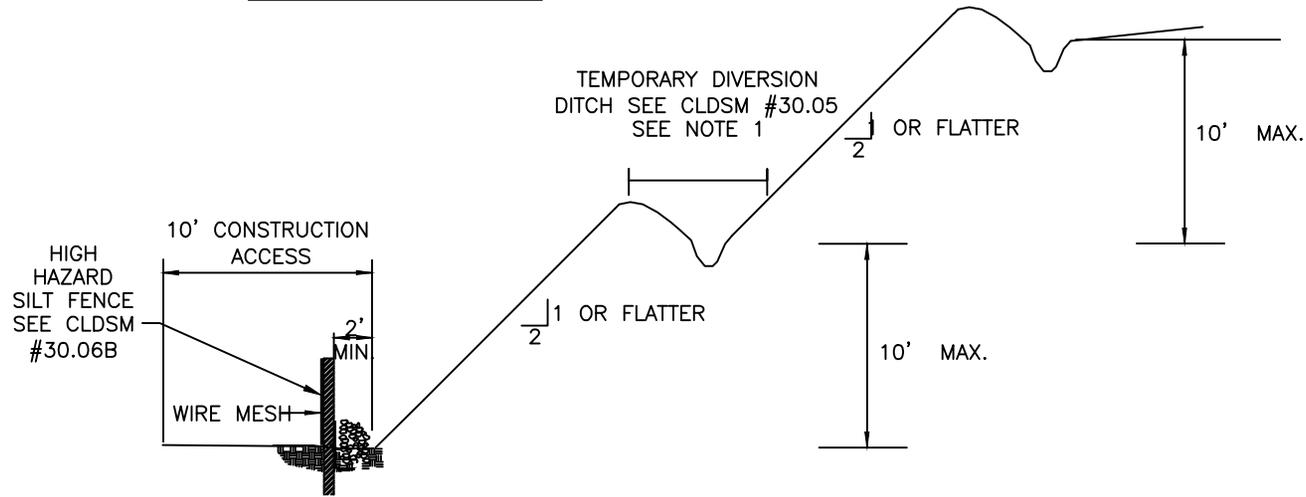

NOTES:

1. IF DIVERSION DITCH USED, IT SHOULD FLOW INTO SEDIMENT BASIN ROCK CHECK DAM, OR SLOPE DRAIN
2. BENCH SHOULD BE GRADED AT 0% LONGITUDINAL SLOPE (ON-CONTOUR)

ALTERNATIVE 2:

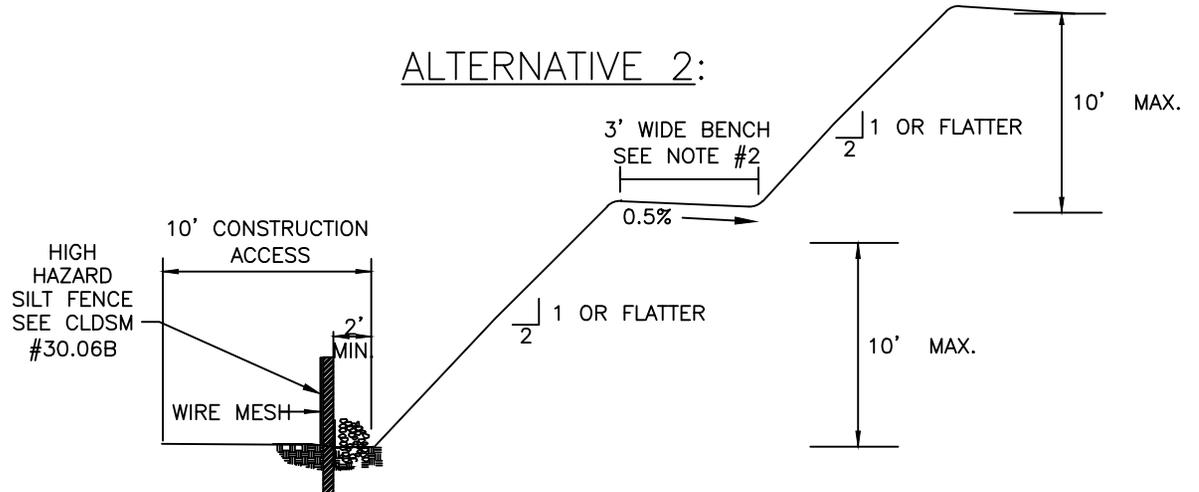

NOT TO SCALE



CITY OF CHARLOTTE
LAND DEVELOPMENT STANDARDS
INCLUDES CHARLOTTE ETJ

SLOPE STABILITY

STD. NO.	REV.
30.16	12