NOTES:

1. WORK IN CREEK SHALL BE PLANNED TO MINIMIZE THE NUMBER OF DAYS OF DISTURBANCE.
2. THE CONTRACTOR IS TO OBSERVE THE LOCAL WEATHER FORECASTS AND NOT BEGIN WORK IN THE CREEK UNLESS AT LEAST THREE DAYS WITHOUT RAIN IS ANTICIPATED.
3. ALL DISTURBED CREEK BED AND BANKS ARE TO BE STABILIZED PRIOR TO THE END OF EACH WORK DAY.
4. FOR LARGER CREEKS, CONSTRUCTION SHOULD OCCUR ON ONE SIDE OF THE CREEK AT A TIME. THE FIRST SIDE SHOULD BE STABILIZED BEFORE BEGINNING CONSTRUCTION ON THE OPPOSITE SIDE.
5. A TEMPORARY PIPE OR PUMP MAY BE INSTALLED TO CONTROL CREEK FLOW DURING CUNSTRUCTION.

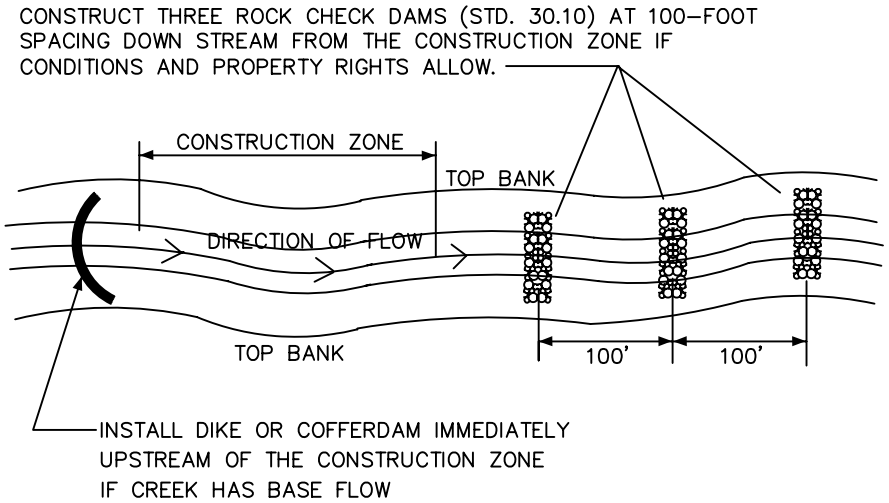

NOT TO SCALE

CHARLOTTE.

CITY OF CHARLOTTE
LAND DEVELOPMENT STANDARDS
INCLUDES CHARLOTTE ETJ

CONSTRUCTION WITHIN CREEK BANK

(FOR USE WITH ROAD CROSSINGS, UTILITY CROSSINGS & CULVERT CONSTRUCTION)

STD. NO.	REV.
30.18	