



TUBULAR MARKER WHITE

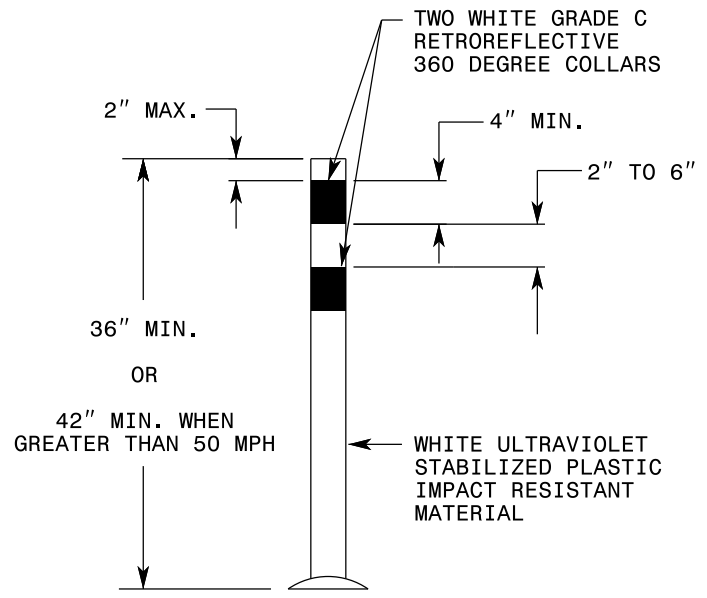

TUBULAR MARKER YELLOW

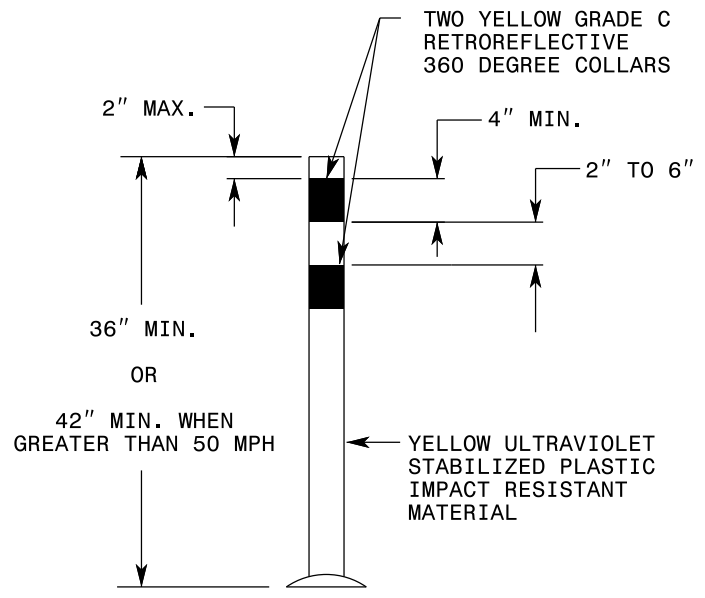

GENERAL NOTES:

- 1- USE TUBULAR MARKERS THAT ARE CIRCULAR IN SHAPE AND HAVE A MINIMUM HEIGHT OF 36" WITH A BROADENED BASED.
- 2- USE TUBULAR MARKERS THAT HAVE A MINIMUM HEIGHT OF 42" ON ROADWAYS WITH POSTED SPEED LIMITS GREATER THAT 50 MPH.
- 3- SPACING OF TUBULAR MARKERS SHALL BE DETERMINED BY THE ENGINEER ON A CASE BY CASE BASIS.
- 4- SECURE/INSTALL TUBULAR MARKERS TO THE PAVEMENT SURFACE USING EPOXY OR OTHER APPROVED TYPES OF ADHESIVES.

STATE OF NORTH CAROLINA
 DEPT. OF TRANSPORTATION
 DIVISION OF HIGHWAYS
 RALEIGH, N.C.

1-18

ROADWAY STANDARD DRAWING FOR
RAISED PAVEMENT MARKERS
 TUBULAR MARKERS