


SECTION A-A

NOTES:

1. BIKE RAMP ALLOWS BICYCLE RIDERS TO TRANSITION FROM AN ON-STREET BICYCLE FACILITY TO/FROM AN OFF-STREET FACILITY.
2. FOR ONE-WAY FACILITIES, BIKE RAMP WIDTH IS 6'. FOR TWO-WAY BIKE FACILITIES, BIKE RAMP WIDTH SHALL MATCH THE WIDTH OF THE MULTI-USE PATH, WITH A MINIMUM WIDTH OF 10'.
3. BIKE RAMP SHALL BE PLACED AT A MINIMUM OF 30' AND A MAXIMUM OF 35' TO THE ROADWAY. BIKE RAMPS SHOULD BE PLACED ENTIRELY WITHIN THE PLANTING STRIP BETWEEN THE MULTI-USE PATH/SIDEWALK AND THE ROADWAY.
4. ON CITY-MAINTAINED STREETS, INSTALL A RETURNED VERTICAL CURB ALONG THE SIDES OF THE BIKE RAMP AS SHOWN, TAPER TO 0" DEPTH AT MUP. ON NCDOT-MAINTAINED STREETS, INSTALL CONCRETE FLARES ALONG THE SIDES OF THE BIKE RAMP.
5. INSTALL 2 TACTILE GUIDE STRIP MODULES ALONG PEDESTRIAN FACILITY.
6. FOLLOW "NCHRP 672 ROUNDABOUTS: AN INFORMATION GUIDE" (CURRENT EDITION) FOR BIKE RAMP PLACEMENT AT ROUNDABOUTS.

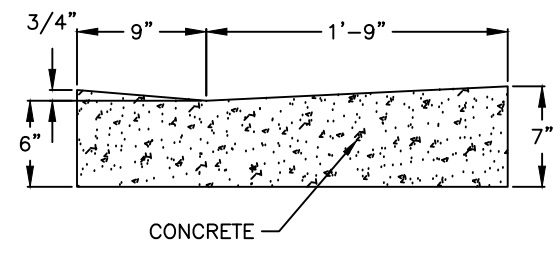

BIKE RAMP GUTTER DETAIL

NOT TO SCALE



CITY OF CHARLOTTE
 LAND DEVELOPMENT STANDARDS
 INCLUDES CHARLOTTE ETJ

BIKE RAMP

STD. NO.	REV.
10.43	21