


STANDARD CUL-DE-SAC

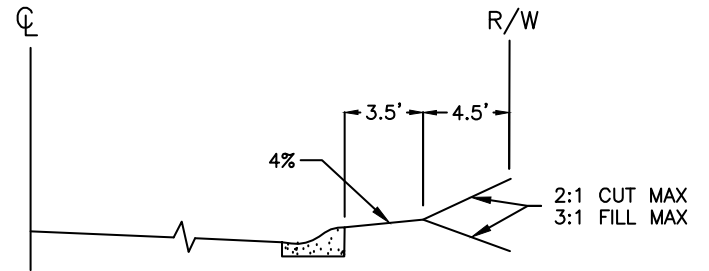

SECTION A-A

APPLICABLE WHEN NO SIDEWALK PRESENT.
PLEASE NOTE: DRIVEWAY STANDARD
MAX. SLOPES AND BREAKOVERS APPLY

NOTES:

1. ALTERNATIVE CUL-DE-SAC DESIGNS, INCLUDING ISLANDS SHALL BE SUBMITTED TO THE CITY ENGINEER AND CDOT FOR REVIEW AND APPROVAL.
2. THE CROWN FOR PAVEMENT SHALL BE 1/4" PER FT FROM THE CENTER OF THE CUL-DE-SAC.
3. REFER TO NCDOT STANDARDS FOR DITCH TYPE STREETS IN ETJ.
4. SIDEWALK MAY BE REQUIRED TO EXTEND AROUND CUL-DE-SAC BULB WHERE PARKS OR SCHOOLS HAVE FRONTAGE TO THE END OF THE CUL-DE-SAC.

NOTE: THIS DETAIL IS NOT FOR USE IN ETJ, OR ON NCDOT-MAINTAINED STREETS. REFER TO NCDOT SUBDIVISION ROADS MINIMUM CONSTRUCTION STANDARDS MANUAL.

NOT TO SCALE



CITY OF CHARLOTTE
LAND DEVELOPMENT STANDARDS

CITY OF CHARLOTTE RESIDENTIAL
CUL-DE-SAC DETAIL

STD. NO.	REV.
11.16	13