

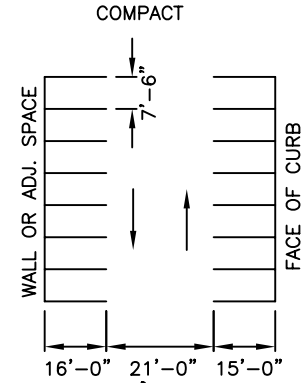
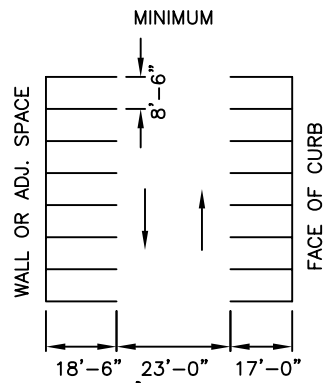
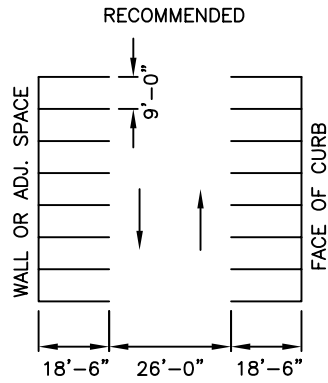






PARKING ANGLE 90°
(TWO WAY OPERATION ONLY)



PARKING ANGLE 60°
(ONE WAY OPERATION ONLY)



PARKING ANGLE 45°
(ONE WAY OPERATION ONLY)

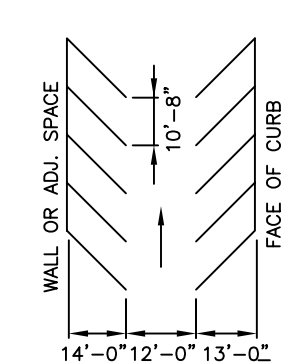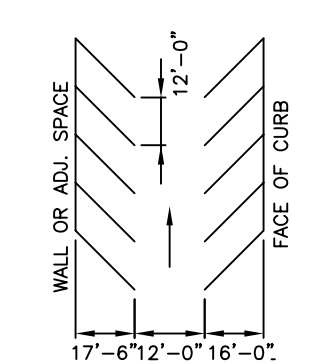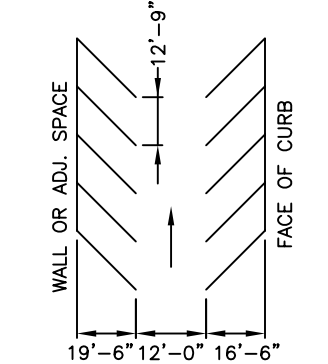

NOTES:

1. FOR ACCESSIBLE PARKING STANDARDS/SIGNAGE SEE STDS. 50.10A, B, AND C.
2. PAVEMENT MARKINGS SHALL BE 4" WHITE PAINT.
3. ALTERNATIVE PARKING ANGLES, AISLE WIDTHS, AND OPERATION (TWO-WAY ANGLED PARKING OR REVERSE-ANGLE PARKING) WILL BE CONSIDERED BY CDOT ON A CASE-BY-CASE BASIS.

NOT TO SCALE



CITY OF CHARLOTTE
LAND DEVELOPMENT STANDARDS
INCLUDES CHARLOTTE ETJ

PARKING STANDARDS

STD. NO.	REV.
50.09A	