


NOTES:

1. PAVEMENT MARKINGS TO BE PER LATEST EDITION OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD).
2. SIGNS TO BE LOCATED/SPACED PER MUTCD REQUIREMENTS.
3. "CIRCULAR INTERSECTION" AND "TRAFFIC CIRCLE" SUBPLATE SIGNS, AND YELLOW TUBULAR MARKERS, ARE REQUIRED ON THOROUGHFARES. CDOT WILL DETERMINE IF ONE OR MORE OF THESE ARE NECESSARY ON LOCAL OR COLLECTOR STREETS.
4. "PEDESTRIAN CROSSING" AND ARROW SUBPLATE SIGNS ARE REQUIRED WHEREVER THERE IS A MARKED CROSSWALK OR ON A THOROUGHFARE.
5. "YIELD" SIGNS ARE ALWAYS REQUIRED.
6. PAVEMENT MARKINGS, SPLITTER ISLAND DESIGNS, CROSSWALK, ETC., ARE SHOWN FOR CONTEXT ONLY. REFER TO THE MUTCD AND/OR THE FEDERAL HIGHWAY ADMINISTRATION'S MANUAL ROUNDABOUTS: AN INFORMATIONAL GUIDE FOR MORE DETAIL OR DESIGN INFORMATION.
7. ADDITIONAL SIGNS MAY BE NEEDED ON A CASE-BY-CASE BASIS, TO BE EVALUATED BY CDOT.
8. ALL PAVEMENT MARKING SHALL BE THERMOPLASTIC.



NOT TO SCALE

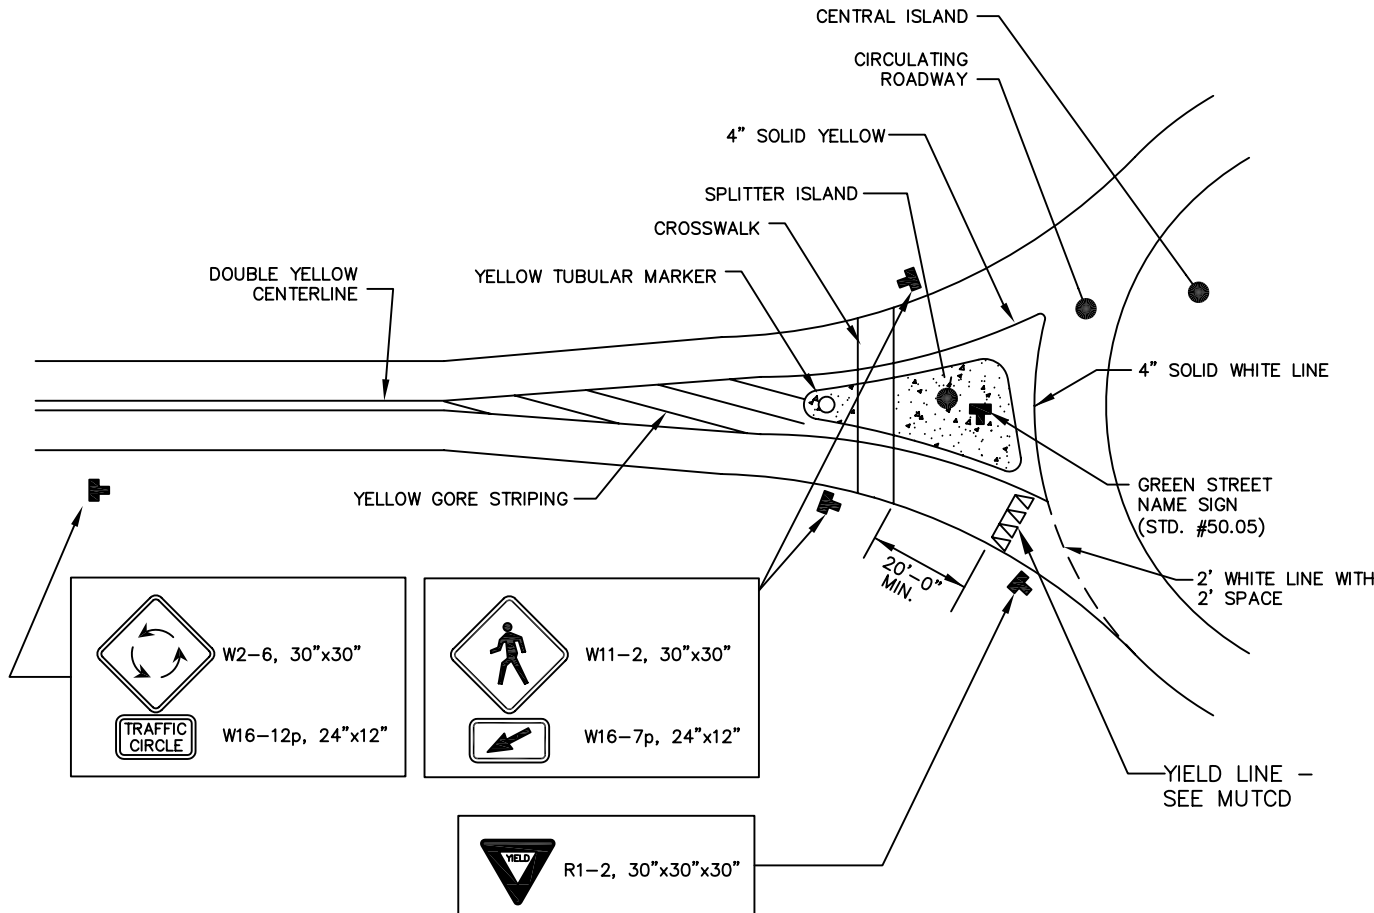

**CITY OF CHARLOTTE**  
**LAND DEVELOPMENT STANDARDS**  
 INCLUDES CHARLOTTE ETJ

**SIGNAGE AND PAVEMENT MARKINGS**  
**AT ROUNDABOUTS**

STD. NO.	REV.
50.11	1