

Rezoning Transportation Analysis
Petition Number: Insert Zoning Petition #2021-060
General Location Identifier: 09509220

From: Robyn Byers, Ph.D.
 Robyn.Byers@charlottenc.gov
 704-336-7404

Reviewer: Walta Blackmon
 Walta.Brimskine@charlottenc.gov
 704-432-1556

Revision Log:	Date	Description
	05-27-2021	First Review (WB)

General Review Information

The petition is located adjacent to Morningside Drive, a City-maintained local street, and Central Avenue, a City-maintained major thoroughfare. The petition is in the Southeast Corridor and East Wedge inside Route 4. Applicable area plans include the Eastside Strategy Plan.

Active Projects Near the Site:

- N/A

CDOT's review of this rezoning petition is intended to provide consistency with council adopted policies, plans, standards and guidelines including, but not limited to, the [Transportation Action Plan \(TAP\)](#), [Vision Zero](#), [Urban Street Design Guidelines \(USDG\)](#), [Center, Corridor and Wedges](#), [Charlotte BIKES](#), [Traffic Impact Study Guidelines](#) and [Charlotte WALKS](#). With a commitment to design complete streets, this review is to ensure that the City's transportation network supports current and future land uses and includes streets that provide safe and comfortable mobility for motorists, pedestrians, bicyclists, and transit users.

This document is primarily for communication to Planning Department staff as part of the overall City staff analysis of the rezoning petition and includes an overall summary of the case from a transportation perspective, information on trip generation, and resolved or outstanding site plan concerns. Additional advisory information about the driveway permit process is provided for information only.

Based on our review of the petition, we offer the following information for your consideration.

Transportation Summary

The site is located on Central Avenue, a City-maintained major thoroughfare and Morningside Drive, a City-maintained Local Road. The petitioner commits to providing a 6-foot sidewalk with an 8-foot planting strip along Morningside Drive and an 8-foot sidewalk with an 8-foot planting strip along Central Avenue. The wider sidewalk also meets the Charlotte WALKS Policy. Site plan revisions are needed to meet ordinance requirements and/or the outstanding items including, but not limited to installing two curb ramps at the Central Avenue and Morningside Drive Intersection per ADA law and PROWAG standards and providing a new conditional note. Further details are listed below.

Trip Generation

Scenario	Land Use	Intensity	Trip Generation (vehicle trips/day)	Source
Existing Use	Single Family	1 Dwellings	2,540	Tax Record
	Retail	7,470 SF		
	Gas station	2,400 SF		
Entitled Use	Retail	8,100 SF	1,110	General Guidance from Planning
	Single Family	2 Dwellings		

Rezoning Transportation Analysis
 Petition Number: Insert Zoning Petition #2021-060
 General Location Identifier: 09509220

Proposed Use	MUDD-CD	Too many uses to determine	-	General Guidance from Planning
--------------	---------	----------------------------	---	--------------------------------

Provide comments to the specified comments below.

Outstanding Issues

Strikethrough = Resolved


1. **Curbline:** The proposed zoning district has a setback measured from back of the existing or proposed future curbline.
 - a. **Central Avenue:** The future location of curb and gutter is in its existing location.
 - b. **Morningside Drive:** The future location of curb and gutter is in its existing location.

Label and dimension the curb and gutter from the centerline for each road on the site plan.

2. **Traffic Study:**

A Traffic Impact Study (TIS) is not necessary for the complete review of this petition due to the site generating less than 2,500 daily trips. If during the permitting process the site generates more than 2,500 daily trips, then a traffic study will be required.

3. Site plan and conditional note(s) revisions are needed to install two curb ramps at the Central Avenue and Morningside Drive Intersection per ADA law and PROWAG standards.

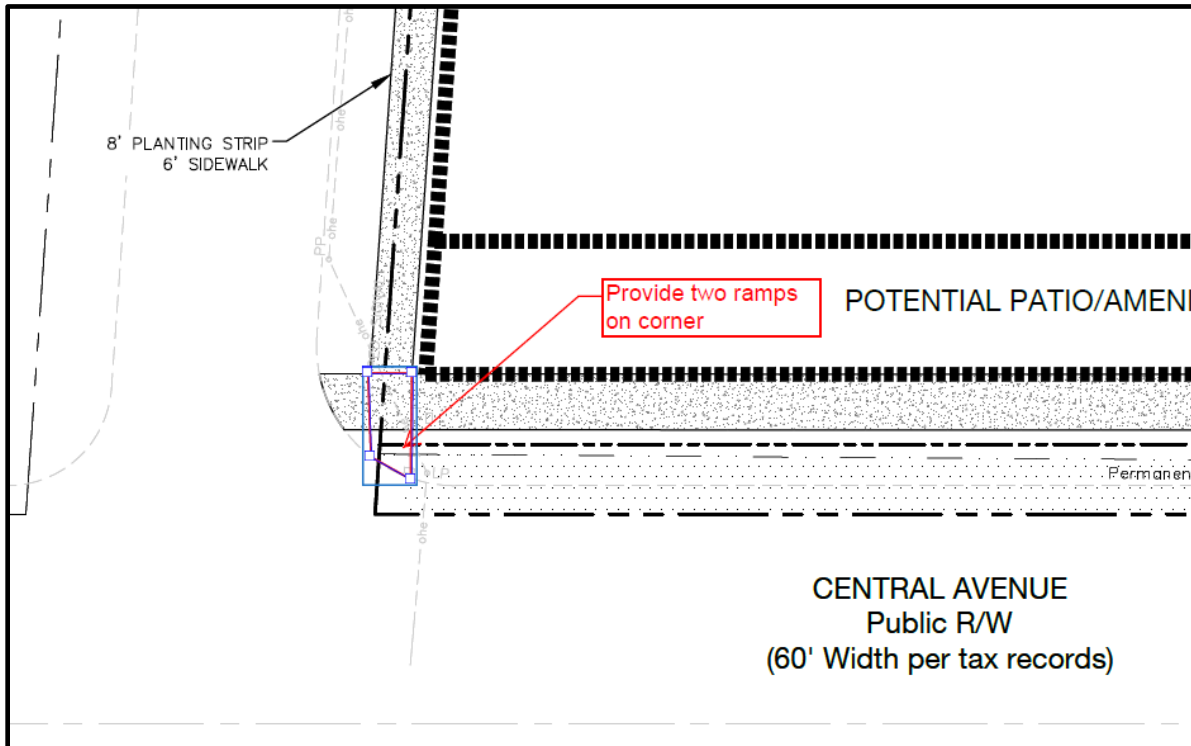

4. Add a site plan note(s) specifying dedication and fee simple conveyance of all rights-of-way to the City before the site's first building certificate of occupancy is issued is needed. CDOT requests rights-of-way set at 2' behind back of sidewalk where feasible.

Rezoning Transportation Analysis
Petition Number: Insert Zoning Petition #2021-060
General Location Identifier: 09509220

Advisory Information

The following are requirements of the developer that must be satisfied prior to driveway permit approval. These requirements shall be reflected on the rezoning plan, as appropriate.

1. The setback for this district is measured from the back of the existing or future curbline as determined by CDOT and Planning during the permitting process.
2. CDOT has the authority to regulate/approve all private street/driveway and public street connections to the right-of-way of a street under the regulatory jurisdiction of the City of Charlotte, per the City of Charlotte's Driveway Regulations.
3. Adequate sight triangles must be reserved at the existing/proposed street entrance(s). Two 35' x 35' sight triangles (and two 10' x 70' sight triangles on NCDOT-maintained streets) are required for the entrance(s) to meet requirements. All proposed trees, berms, walls, fences, and/or identification signs shall not interfere with sight distance at the entrance(s) and shall be identified on the site plan.
4. The proposed driveway connection(s) to public streets will require a driveway permit(s) to be submitted to CDOT (and NCDOT on NCDOT-maintained streets) for review and approval. The exact driveway location(s) and type/width of the driveway(s) will be determined by CDOT during the driveway permit process. The locations of the driveway(s) shown on the site plan are subject to change in order to align with driveway(s) on the opposite side of the street and comply with City Driveway Regulations and the City Tree Ordinance.
5. All proposed commercial driveway connections to a future public street will require a driveway permit submitted to CDOT for review and approval.
6. Any fence or wall constructed along or adjacent to any sidewalk or street right-of-way requires a certificate issued by CDOT.
7. A Right-of-Way Encroachment Agreement is required for the installation of any non-standard item(s) (irrigation systems, decorative concrete pavement, brick pavers, etc.) within a proposed/existing City-maintained street right-of-way by a private individual, group, business, or homeowner's/business association. An encroachment agreement must be approved by CDOT prior to construction/installation. Contact CDOT for additional information concerning cost, submittal, and liability insurance coverage requirements.
8. The petitioner needs to complete and submit the [Right of way Abandonment Petition form](#) to CDOT for review. The decision of this rezoning petition does not correlate with the decision of the possible abandonment, as this decision is issued within the separate Right of Way Abandonment process that is controlled by North Carolina General Statutes.
9. To attain a street and pedestrian lighting recommendation, the petitioner should coordinate with Anthony Mendez, CDOT. Please visit the following link:
<https://charlottenc.gov/Transportation/Programs/Pages/StreetLighting.aspx>